

## LR SERIES POCKET SCALE



**Very accurate, compact, practical and inexpensive pocket scale.**

### MAIN FEATURES

- **Backlit green** LCD display with 6 digits 8 mm high.
- Mechanical keypad with 3 function keys: on/off, function command, tare / zero.
- Stainless steel plate with transparent protective cover.
- Power supply: 2 built-in CR2032 batteries 3 V (included).
- Black protection case included.
- Packaging: dimensions: 111 x 83 x 21 mm - weight: 125 g.
- Master Pack of 4 units: dimensions: 4 x (111 x 83 x 21) mm - weight: 4 x (125 g) approximately.

### FUNCTIONS

- unit of measure conversion: g, oz, dwt, ozt, gn, ct.
- automatic tare;
- zeroing;
- digital calibration;
- automatic switch-off after 20 seconds;

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	Masterpack Price € 4 pcs
LR250	48 X 84	250	0,1	49,00	LR250C 119,00

## LS SERIES POCKET SCALE



**Very accurate and highly versatile professional pocket scale. Counting, weigh percentile and unit of measure conversion functions.**

### MAIN FEATURES

- LCD display with 6 digits 8 mm high with icons indicating the active functions.
- Mechanical membrane keypad with 4 function keys: function command, unit of measure conversion; tare / zero; on / off.
- Stainless steel plate with transparent protective cover.
- Adjustable level and feet.
- Power supply: 2 built-in CR2032 batteries 3 V (included).
- Black protection case included.
- Packaging: dimensions 90 x 141 x 30 mm - weight 195 g.
- Master Pack of 4 units: dimensions: 4 x (90 x 141 x 30) mm - weight: 4 x (195 g) approximately.

### FUNCTIONS

- counting;
- weigh percentile;
- unit of measure conversion: g, oz, dwt, ozt, gn, ct;
- automatic tare;
- zeroing;
- automatic switch-off after 20 seconds;

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
LS210	diam. 75	210	0,01	89,00	CS4	60,00	LS210C 219,00
LS500	diam. 75	500	0,1	59,00	CS4	60,00	LS500C 139,00

## PK SERIES POCKET SCALE



**Extremely compact and accurate scale for professional use and for weighing anywhere. Sturdy and reliable in any weighing condition; the opening on the protection shell allows to protect the scale without inhibiting the weighing.**

### MAIN FEATURES

- LCD display with 5 digits 13 mm high with icons indicating the active functions.
- Mechanical membrane waterproof keypad with 4 keys: on / off, tare, function command, calibration / unit of measure conversion.
- Power supply: 2 built-in AAA 1,5 V batteries (included).
- Openable shell with protection feature from knocks and from the wind, for very light weighs.
- Black protection case included.
- Packaging in a shockproof envelope: dimensions: 144 x 84 x 30 mm - weight: 160 g.
- Master Pack of 4 units: dimensions: 4 x (144 x 84 x 30) mm - weight: 4 x (160 g) approximately.

### FUNCTIONS

- counting;
- unit of measure conversion: g, oz, dwt, ozt;
- automatic tare;
- zeroing;
- automatic switch-off after 3 minutes;
- low battery warning.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	Masterpack Price € 4 pcs
PK250	65x80	250	0,1	89.00	PK250C 219,00

## LK SERIES POCKET SCALE



**Multifunction scale for professional use, extremely compact and accurate for weighing anywhere. Fitted with protection cover for the transport.**

### MAIN FEATURES

- LCD display with 5 digits.
- Mechanical membrane waterproof keypad with 5 keys: on / off, zero, tare, function command / unit of measure conversion; net / gross weight display.
- Power supply: 3 built-in AAA 1.5V batteries (included).
- Openable shell with protection feature from knocks and from the wind, for very light weighs.
- Black protection case included.
- Packaging: Single pack in a shockproof envelope - dimensions: 155 x 92 x 35 mm - weight: 230 g.
- Master Pack of 4 units: dimensions: 4 x (155 x 92 x 35) mm - weight: 4 x (230 g) approximately.

### FUNCTIONS

- counting;
- unit of measure conversion: g, oz;
- net weight / gross weight visualisation.
- automatic tare;
- zeroing;
- digital calibration;
- automatic switch-off;

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	Masterpack Price € 4 pcs
LK500	70x85	500	0,1	69.00	LK500C 159,00

## M10K6 SERIES ALL-PURPOSE PORTABLE SCALE



**All-purpose scale for office and/or laboratory. Featured by reduced size and large load capacity, it offers high weighing accuracy thanks to the 6000 reading divisions.**

### MAIN FEATURES

- LCD display with 4 digits 15 mm high.
- Mechanical membrane keypad with 3 keys: on/tare, off, unit of measure conversion.
- Satined stainless steel plate.
- Power supply: 9 V built-in battery (not included).
- Packaging: dimensions: 310 x 250 x 95 mm - weight: 1,3 kg.
- Master Pack of 4 units: dimensions: 410 x 340 x 260 mm - weight 6 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- unit of measure conversion: oz, lb, dwt, ozt, preset (customisable units of measure);
- automatic tare;
- zeroing;
- digital calibration;
- autoswitch-off;
- low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
M10K6	175x175	6	1	89.00	CS5	80,00	M10K6C 219,00

## M30K10 SERIES POSTAL SCALE



**All-purpose ideal scale ideal for weighing envelopes and packages of all types. Fitted with large satined STAINLESS steel plate and with triple range reading, for obtaining precise weighs and taking advantage of the high load capacity.**

### MAIN FEATURES

- LCD display with 4 digits 19mm high.
- Mechanical waterproof keypad with 2 keys: on / tare, off.
- Satined stainless steel plate.
- Power supply: 9 V built-in battery (not included).
- Packaging: dimensions 340 x 280 x 120 mm - weight 2,5 kg.
- Master Pack of 4 units: dimensions: 520 x 390 x 300 mm - weight 12 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- automatic tare;
- zeroing;
- digital calibration;
- autoswitch-off;
- low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
M30K10	180x290	1 / 4 / 10	2 / 5 / 10	99.00	CS5	80,00	M30K10C 239,00

## AQM SERIES BENCH SCALES



Simple all-purpose compact and portable scale. Easy to clean, ideal for environments with high hygiene requirements as well as kitchens or small work spaces. Available also CE-M APPROVED for legal for trade use.

### MAIN FEATURES

- LCD display with 4 digits.
- Mechanical membrane waterproof functional keypad with 4 keys: off, on / zero, 10x high resolution visualisation, tare.
- Stainless steel plate.
- Adjustable feet and level.
- Power supply: rechargeable built-in battery (120-hour operating time) and 230 Vac mains adapter (included).
- Packaging: dimensions: 340 x 255 x 190 mm - weight: 3,6 kg.
- Master Pack of 2 units: dimensions: 2 x (340 x 255 x 190) mm - weight: 2 x (3,6 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- automatic tare;
- zeroing;
- digital calibration;
- auto switch-off;
- 10x high resolution visualisation.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
AQM1500	170x200	1500	0,5	199,00	CS4	60,00	ECEM1A	35,00	AQM1500C 319,00
AQM3000	170x200	3000	1	199,00	CS4	60,00	ECEM1A	35,00	AQM3000C 319,00
AQM6000	170x200	6000	2	199,00	CS5	80,00	ECEM1A	35,00	AQM6000C 319,00

## MII SERIES PORTABLE BENCH SCALES



Practical and functional compact scale for labs and offices. Small-sized and high precision.

### MAIN FEATURES

- LCD display with 4 digits 20 mm high, easily visible from all angles.
- Mechanical membrane waterproof functional keypad with 4 keys: off, on / zero, unit of measure conversion, tare.
- Stainless steel plate and structure in ABS.
- Power supply: 9 V internal battery (not included) or 230Vac mains power adapter (included).
- Packaging: dimensions: 350 x 270 x 100 mm - weight: 1,4 kg.
- Master Pack of 2 units: dimensions: 2 x (350 x 270 x 100) mm - weight: 2 x (1,4 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- automatic tare;
- zeroing;
- digital calibration;
- auto switch-off;
- unit of measure conversion: g, lb, oz.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
MII600	130 x 205	0,6	0,1	159,00	CS4	60,00	MII600C 249,00
MII6000	130 x 205	6	1	159,00	CS5	80,00	MII6000C 249,00

## AXM SERIES PORTABLE BENCH SCALES



**Compact and portable precision scale. Available also CE-M APPROVED for legal for trade use.**

### MAIN FEATURES

- Backlit LCD display with 5 digits 25 mm high, easily visible from all angles.
- Membrane waterproof functional keypad with 4 keys: off, on / zero, function command, tare.
- Stainless steel plate and protection cover.
- Adjustable feet and level.
- Power supply: built-in rechargeable battery (120-hour operating time) and fitted 230 Vac mains adapter.
- Packaging: dimensions: 400 x 345 x 175 mm - weight: 4,4 kg.
- Master Pack of 2 units: dimensions: 2 x (400 x 345 x 175) mm - weight 2 x (4,4 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS


- unit of measure conversion: kg / g; 10x high resolution visualisation; automatic tare; auto switch-off; zeroing; digital calibration; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	HR Division g (*)	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
AXM1500	215x250	1,5	0,5	0,2	289,00	CS4	60,00	ECEM1A	35,00	AXM1500C 459,00
AXM3000	215x250	3	1	0,5	289,00	CS4	60,00	ECEM1A	35,00	AXM3000C 459,00
AXM6000	215x250	6	2	1	289,00	CS5	80,00	ECEM1A	35,00	AXM6000C 459,00
AXM15K	215x250	15	5	2	289,00	CS5	80,00	ECEM1A	35,00	AXM15KC 459,00
AXM30K	215x250	30	10	5	289,00	CS5	80,00	ECEM1A	35,00	AXM30KC 459,00

(\*) HR 6000 d programmable divisions from set-up

## AM SERIES PORTABLE BENCH SCALES

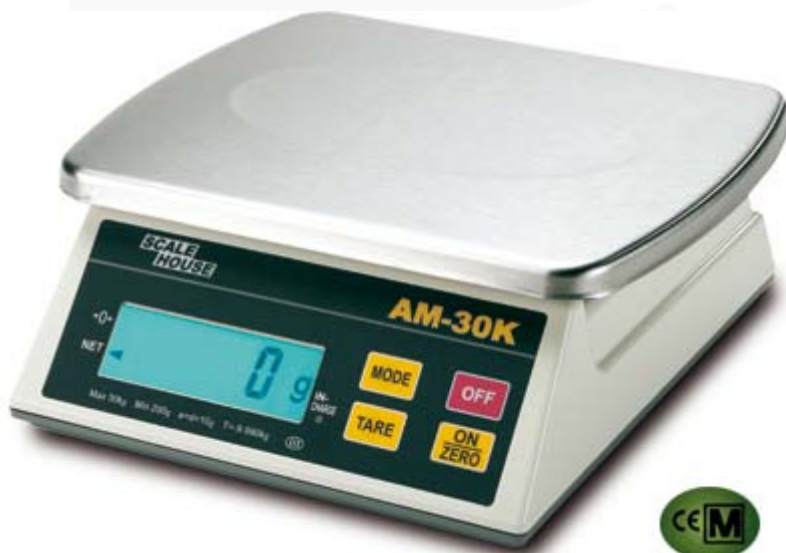

**Portable scale with dual display, customer and operator side, for commercial use.**

### MAIN FEATURES

- Dual backlit LCD display (customer/operator side) with digits 25 mm high.
- Mechanical membrane waterproof functional keypad with 4 keys: off, on/zero, tare, function command .
- Stainless steel plate and protection cover.
- Adjustable feet and level.
- Power supply: built-in rechargeable battery (200-hour operating time) and fitted 230Vac mains power adapter.
- Operating temperature from 0° C to +40° C.
- Mechanical protection from knocks and overloads.
- Packaging: dimensions: 360 x 400 x 235 mm - weight: 5,4 kg.
- Master Pack of 2 units: dimensions: 380 x 420 x 490 mm - weight: 12 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- 1 point calibration; zeroing; automatic tare up to a third of the capacity; auto switch-off; backlight command; low battery warning.

### Available versions (For legal for trade use the CE-M approved version is compulsory)

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
AM3000	282x337	3	1	329,00	CS4	60,00	ECEM1A	35,00	AM3000C 529,00
AM6000	282x337	6	2	329,00	CS5	80,00	ECEM1A	35,00	AM6000C 529,00
AM15K	282x337	15	5	329,00	CS5	80,00	ECEM1A	35,00	AM15KC 529,00
AM30K	282x337	30	10	329,00	CS5	80,00	ECEM1A	35,00	AM30KC 529,00

## ASW SERIES ALL-PURPOSE PORTABLE BENCH SCALES



**All-purpose professional scale with the following functions: Counting, Weight or item quantity check with acoustic indication, and Accumulation.**

### MAIN FEATURES

- Backlit LCD display with 6 digits 24 mm high.
- Membrane functional waterproof keypad with 7 digits.
- Stainless steel plate and transparent plastic protection cover.
- Adjustable feet and level.
- Power supply: built-in rechargeable battery (70-hour battery life) and 230 Vac power adapter (included).
- Packaging: dimensions: 415 x 380 x 190 mm - weight: 5 kg.
- Master Pack of 2 units: dimensions: 2 x (415 x 380 x 190) mm - weight: 2 x (5 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: internal resolution of 300.000 points; percentile weigh; quantity check with 2 weight or piece thresholds accompanied by an acoustic alarm; manual or automatic weight accumulation; unit of measure conversion: kg, g, lb, oz; digital calibration; zeroing; zero tracking; automatic tare; auto switch-off; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
ASW3	225x300	3	0,1	0,01	229,00	CS4	60,00	ASW3C 369,00
ASW30	225x300	30	1	0,1	229,00	CS5	80,00	ASW30C 369,00

## NWS SERIES ALL-PURPOSE PORTABLE BENCH SCALES



**All-purpose compact and portable bench scale. Suitable for professional, foodstuff and industrial use. Counting function and Quantity check with double programmable weight threshold.**

### MAIN FEATURES

- LCD backlit display with 6 digits 28 mm high, easily visible from all angles.
- Mechanical membrane waterproof functional keypad with 8 keys: Cali., Model, Unit, Set, Zero, Tare, (arrow up), Enter.
- Stainless steel plate. Level and adjustable feet.
- Power supply: built-in rechargeable 6 V battery and 230Vac mains adapter (included).
- Operating temperature: from 0° C to 40° C.
- Packaging: dimensions: 310 x 130 x 370 mm - weight 3,7 kg.
- Master Pack of 4 units: dimensions: 4 x (310 x 130 x 370) - weight 4 x (3,7 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: internal resolution of 300.000 points; percentage weigh; quantity check with 2 weight thresholds; lb/kg conversion; automatic tare; digital calibration; automatic zero at start-up; zero tracking; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
NWS6K	218 x 267	6	2	149,00	CS5	80,00	NWS6KC 359,00
NWS15K	218 x 267	15	5	149,00	CS5	80,00	NWS15KC 359,00
NWS30K	218 x 267	30	10	149,00	CS5	80,00	NWS30KC 359,00
NWSH30K	218 x 267	30	1	199,00	CS5	80,00	NWSH30KC 559,00

## NWL SERIES ALL-PURPOSE PORTABLE BENCH SCALES



**All-purpose portable scale with large stainless steel plate. Counting function and Quality control with dual weight threshold.**

### MAIN FEATURES

- LCD backlit display with 6 digits 28 mm high, easily visible from all angles.
- Mechanical membrane waterproof functional keypad with 8 keys: Cali., Model, Unit, Set, Zero, Tare, (arrow up), Enter.
- Stainless steel plate.
- Level and adjustable feet.
- Power supply: built-in rechargeable 6 V battery and 230Vac mains adapter (included).
- Operating temperature: from 0° C to 40° C.
- Packaging: dimensions: 380 x 130 x 370 mm - weight: 4 kg.
- Master Pack of 4 units: dimensions: 4 x (380 x 130 x 370) mm - weight 4 x (4 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- 1 point calibration; automatic zero at start-up; zero tracking; automatic tare; lb/kg conversion; counting: internal resolution of 300.000 points; percentage weigh; quantity control with 2 weight thresholds; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
NWL6K	235 x 335	6	2	189,00	CS5	80,00	NWL6KC 459,00
NWL15K	235 x 335	15	5	189,00	CS5	80,00	NWL15KC 459,00
NWL30K	235 x 335	30	10	189,00	CS5	80,00	NWL30KC 459,00
NWLH30K	235 x 335	30	1	249,00	CS5	80,00	NWLH30KC 599,00

## M50K100 SERIES PACKAGE WEIGHING SCALE



**All-purpose sturdy and low profile portable scales with large capacity, ideal for weighing packages, vegetable crates, all types of objects; extensible spiraled cable, for the best positioning of the indicator.**

### MAIN FEATURES

- LCD display with 4 digits.
- Mechanical membrane keypad with 3 keys: on / tare, off, unit of measure conversion.
- Satined stainless steel plate.
- Power supply: 9 V built-in battery (not included).
- Packaging: dimensions: 320 x 450 x 70 mm - weight: 2,5 kg.
- Master Pack of 4 units: dimensions: 470 x 350 x 290 mm - weight 12 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- unit of measure conversion: lb/oz, preset (customisable units of measure);
- automatic tare;
- zeroing;
- digital calibration;
- autoswitch-off;
- low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
M50K100	275x290	100	50	139,00	CS6	90,00	M50K100C 339,00

## KS BENCH SCALES



**All-purpose very sturdy small-sized bench scales, ideal for weighing packages, vegetable crates, and all kinds of objects, also on mobile carts.**

### MAIN FEATURES

- LCD display with 6 digits 15 mm high
- Mechanical membrane waterproof keypad with 4 keys: on / off, function command, unit of measure conversion, tare / zero.
- Plate and structure in stainless steel.
- Indicator in anodised aluminium with bracket for fixing to the wall and extendable cable.
- Power supply: 6 built-in type AA 1,5V batteries (not included) or 230 Vac / 9Vdc - 100mA mains power adapter included.
- Serial Port: RS232/C for connection to PC.
- Operating temperature: from 15° C to 30° C.
- Packaging: dimensions: 445 x 346 x 70 mm - weight: 4,5 kg.
- Master Pack package size 5 units: dimensions: 460 x 360 x 390 mm - weight: 23 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- "hold" function;
- lb/kg conversion;
- automatic tare;
- zeroing;
- zero tracking;
- auto switch-off;
- low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 5 pcs
KS30	330 x 320	30	10	189.00	CS5	80,00	KS30C 559,00
KS60	330 x 320	60	20	189.00	CS6	90,00	KS60C 559,00
KS150	330 x 320	150	50	189.00	CS6	90,00	KS150C 559,00

## APS SERIES STAINLESS STEEL SCALES

**INOX**



**Easy to clean stainless steel bench scales with attached column. These are suitable as checking scales in the food industry. Totalisation function of the executed weighs.**

### MAIN FEATURES

- Backlit LCD display with 5 digits 25 mm high viewable from all angles and with adjustable inclination.
- Mechanical membrane functional waterproof keypad with 8 keys.
- Adjustable stainless steel feet for levelling.
- Power supply: built-in rechargeable battery (200-hour operating time) and 230Vac power adapter (included).
- Operating temperature: from 0° C to +40° C.
- Protection cover.
- Total height scale including column and indicator is 460 mm.
- Packaging: dimensions: 510 x 400 x 230 mm - weight: 8,5 kg.
- Master Pack of 2 units: dimensions 540 x 410 x 475 mm - weight 18,3 kg.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- weighs accumulation; unit of measure conversion: kg, lb; automatic tare; zeroing; high resolution x 10 visualisation; digital calibration; auto switch-off; backlight command; low battery warning.

**WATERPROOF**



### Available versions

Code	Plate mm	Max Capacity	Division g	HR Division g (*)	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
APS6	280x336	6	2	1	549.00	CS5	80,00	ECEM1A	35,00	APS6C 879,00
APS15	280x336	15	5	2	549.00	CS5	80,00	ECEM1A	35,00	APS15C 879,00
APS30	280x336	30	10	5	549.00	CS5	80,00	ECEM1A	35,00	APS30C 879,00

(\*) HR 6000 d programmable divisions from set-up

## AFWC AND AFWD COLUMN SCALES



**Versatile bench or floor scale with attached column, for control and production. It may be used as a piece counting scale, for weight control with dual threshold, or for Totalisation. Available also CE-M APPROVED for legal for trade use.**

### MAIN FEATURES

- Backlit LCD display with 6 digits 24 mm high, easily visible from all angles with adjustable inclination.
- Mechanical membrane functional keypad with 7 keys.
- Stainless steel plate. Indicator support column. Protection cover.
- Power supply: built-in rechargeable battery (90-hour life) and fitted 230 Vac power adapter.
- Operating temperature from 0°C to +40°C.
- Overall height from ground with indicator and column: - C model (860 mm); - D model (920 mm).
- Packaging:
  - C model: dimensions 800 x 510 x 220 mm - weight 15,5 kg;
  - D model: dimensions 840 x 580 x 200 mm - weight 17 kg.
- Master Pack of 2 units:
  - C model: dimensions: 2 x (800 x 510 x 220) mm - weight: 2 x (15,5 kg) approximately;
  - D model: dimensions: 2 x (840 x 580 x 200) mm - weight: 2 x (17 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: internal resolution of 600.000 points; quantity check with 2 weight or piece thresholds accompanied by an acoustic alarm; manual or automatic weight accumulation, in loading or in unloading; unit conversion: kg, g, lb, oz; zeroing; automatic tare; digital calibration; weighing filter enabling; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
AFWC30	350x450	30	10	0,05	399,00	CS5	80,00	ECEM1A	35,00	AFWC30C 649,00
AFWC60	350x450	60	20	0,1	399,00	CS6	90,00	ECEM1B	70,00	AFWC60C 649,00
AFWC150	350x450	150	50	0,25	399,00	CS6	90,00	ECEM1B	70,00	AFWC150C 649,00
AFWD60	420x520	60	20	0,1	459,00	CS6	90,00	ECEM1B	70,00	AFWD60C 749,00
AFWD150	420x520	150	50	0,25	459,00	CS6	90,00	ECEM1B	70,00	AFWD150C 749,00
AFWD300	420x520	300	100	0,5	459,00	CS7	100,00	ECEM1B	70,00	AFWD300C 749,00

## APM SERIES PORTABLE BENCH SCALES



**Bench scale with weight indicator attached to the platform or fixable to the wall (stretchable cable). Available also CE-M APPROVED for legal for trade use.**

### MAIN FEATURES

- Backlit LCD display having 5 digits 25mm high easily viewable from all angles.
- Membrane waterproof keypad with 7 keys: on/off, zero, tare, mode, hold, M+, MR.
- Stainless steel plate and protection cover. Level and adjustable feet.
- Attached column (optional).
- Power supply: built-in rechargeable battery (300-hour operating time) and 230 Vac power adapter (included). Operating temperature from 0°C to +40°C.
- Packaging: dimensions: 510 x 400 x 200 mm - weight: 7,3 kg.
- Master Pack of 2 items: dimensions 2 x (510 x 400 x 200) mm - weight 2 x (7,3 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- weighs accumulation; automatic tare; zeroing; automatic tare; 2-point calibration; auto switch-off; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	HR Division g (*)	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
APM15	280x330	15	5	2	269,00	CS5	80,00	ECEM1A	35,00	APM15C 439,00
APM30	280x330	30	10	5	269,00	CS5	80,00	ECEM1A	35,00	APM30C 439,00
APM60	280x330	60	20	10	289,00	CS6	90,00	ECEM1B	70,00	APM60C 469,00
APM150	280x330	150	50	20	289,00	CS6	90,00	ECEM1B	70,00	APM150C 469,00

(\*) HR 6000 d programmable divisions from set-up

## ADW SERIES COUNTING AND +/- CHECKING SCALES



**WATERPROOF**

Upon request: SIT calibration with issuing of relative certificate.

**+/- checking or counting scale with IP66 protection. Suitable for harsh work and environment conditions. Available also CE-M APPROVED for legal for trade use.**

### MAIN FEATURES

- Backlit LCD display with 5 digits.
- Mechanical membrane waterproof functional keypad with 4 keys: off, on / zero, function command, tare.
- Stainless steel plate. Level and adjustable feet.
- Highly accurate 1 load cell detection system.
- Power supply: built-in rechargeable battery (120-hour operating time) and 230Vac mains power adapter (included).
- Packaging: dimensions: 350 x 330 x 205 mm - weight: 5 kg.
- Master Pack of 2 units: dimensions: 2 x (350 x 330 x 205) mm - weight: 2 x (5 kg) approximately.

### FUNCTIONS

- quality check with 2 weights with acoustic warning; piece counting and +/- checking; high resolution x 10 visualisation; automatic tare on the whole capacity; zeroing; digital calibration; auto-switch off; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	HR Division g (*)	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
ADW3	250x215	3	1	0,5	339,00	CS4	60,00	ECEM1A	35,00	ADW3C 549,00
ADW6	250x215	6	2	1	339,00	CS5	80,00	ECEM1A	35,00	ADW6C 549,00
ADW15	250x215	15	5	2,5	339,00	CS5	80,00	ECEM1A	35,00	ADW15C 549,00
ADW30	250x215	30	10	5	339,00	CS5	80,00	ECEM1A	35,00	ADW30C 549,00

(\*) HR 6000 d programmable divisions from set-up

## APC SERIES COUNTING SCALES



**Very sturdy and precise COUNTING scale, particularly suitable for taking inventories and for counting small parts; weight indicator attached to the platform or fixed to the wall (extendable cable).**

**Storage of the average piece weight for 8 different articles, quantity control in weight or in pieces, and totalisation. Available also APPROVED for legal for trade use.**

### MAIN FEATURES

- 3 backlit LCD displays with 5 digits 22 mm high for viewing weight, average piece weight, and number of pieces.
- Membrane numerical and functional waterproof keyboard having acoustic and mechanical feedback with 31 keys.
- Stainless steel plate.
- Power supply: built-in rechargeable battery (100-hour life) and fitted 230V mains power adapter.
- Operating temperature from +0°C to +40°C.
- Packaging: dimensions 500 x 390 x 200 mm - weight 7,5 kg.
- Master Pack of 2 units: dimensions: 2 x (500 x 390 x 200) mm - weight: 2 x (7,5 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: entry of sampling items, entry of average piece weight, optimisation of the average piece weight, indication of insufficient average piece weight, 8 recallable "Average Piece Weight" values; quantity check with threshold by weight or by pieces; accumulation by weight and pieces; automatic tare or enterable from keypad; digital calibration; zeroing; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	HR Division g (*)	Resolution g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
APC6	280x330	6	2	1	0,1	399,00	CS5	80,00	ECEM1A	35,00	APC6C 639,00
APC15	280x330	15	5	2	0,25	399,00	CS5	80,00	ECEM1A	35,00	APC15C 639,00
APC30	280x330	30	10	5	0,5	399,00	CS5	80,00	ECEM1A	35,00	APC30C 639,00

(\*) HR 6000 d programmable divisions from set-up

## SAC SERIES COUNTING SCALES



Upon request: SIT calibration with issuing of relative certificate.

**Very accurate COUNTING scale, particularly suitable for taking inventories and counting small parts; fitted with triple range. Storage of the average piece weight of 8 articles, Quantity Check, and Accumulation by weight and pieces.**

### MAIN FEATURES

- 3 backlit LCD displays with 6 digits for viewing the weight, average piece weight, and number of pieces.
- Mechanical membrane waterproof, numerical and functional keypad having acoustic and mechanical feedback with 28 keys.
- Stainless steel plate.
- Power supply: built-in rechargeable battery (100-hour life) and fitted 230V mains power adapter. Operating temperature from +0° C to +40° C.
- Packaging: dimensions: 450 x 420 x 270 mm - weight: 6 kg.
- Master Pack of 2 units: dimensions: 2 x (450 x 420 x 270) mm - weight: 2 x (6 kg) approximately.

### FUNCTIONS

- counting: internal resolution of 600.000 points, entry of sampling items, entry of Average Piece Weight, optimisation of the A.P.W., indication of insufficient A.P.W., 8 recallable "A.P.W." values; quantity check with threshold by weight or by pieces; accumulation by weight and pieces; automatic tare or enterable from keypad; digital calibration; zeroing; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
SAC7.5C	230x345	1,5 / 3 / 7,5	0,1 / 0,2 / 0,5	0,025	369.00	CS5	80,00	SAC7.5CC 589,00
SAC15C	230x345	3 / 7,5 / 15	0,2 / 0,5 / 1	0,05	369.00	CS5	80,00	SAC15CC 589,00
SAC30C	230x345	7,5 / 15 / 30	0,5 / 1 / 2	0,1	369.00	CS5	80,00	SAC30CC 589,00

## BCSD COUNTING SCALES



Upon request: SIT calibration with issuing of relative certificate.

**Very precise COUNTING scale, CONNECTABLE TO A SECOND REMOTE SCALE and to a printer, particularly suitable for taking inventories and for counting small parts. Counting at 600.000 points, 100 PLU memories.**

### MAIN FEATURES

- 3 backlit LCD displays with 6 digits for simultaneously viewing weight, average piece weight, and number of pieces.
- Membrane alphanumeric and functional waterproof keypad with acoustic feedback with 20 keys.
- Stainless steel plate.
- Power supply: rechargeable internal battery (70-hour life) and 230V mains power adapter (included).
- RS232/C bidirectional port for connection to printer/PC.
- Configurable input for connection to second counting platform.
- Operating temperature from +0° C to +40° C.
- Packaging: dimensions: 440 x 370 x 220 mm - weight: 5,5 kg.
- Master Pack of 2 units: dimensions: 2 x (440 x 370 x 220) mm - weight: 2 x (5,5 kg) approximately.

### FUNCTIONS

- counting: internal resolution of 600.000 points, entry of sampling items, entry of Average Piece Weight, optimisation of the A.P.W.; quantity check with 2 weight or piece thresholds accompanied by an acoustic alarm; accumulation by weight and pieces; storing and recalling up to 100 articles (PLU) each with: one alphanumeric description of 12 characters, Tare, Average Piece Weight; digital calibration; zeroing; automatic tare or enterable from keypad; auto switch-off; unit of measure conversion: kg, lb; backlight command; low battery warning.

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
BCSD6	225 x 300	6	0,1	0,01	389.00	CS5	80,00	BCSD6C 629,00
BCSD15	225 x 300	15	0,2	0,025	389.00	CS5	80,00	BCSD15C 629,00
BCSD30	225 x 300	30	0,5	0,05	389.00	CS5	80,00	BCSD30C 629,00

## NCS SERIES COUNTING SCALES



**High performing, accurate and easy to use compact and portable counting scale. Ideal for rentals and inventories.**

### MAIN FEATURES

- **3 green backlit LCD displays** for simultaneously viewing the weight, average piece weight and number of pieces.
- Mechanical membrane waterproof numerical and functional keypad with 16 keys.
- Stainless steel plate.
- Level and adjustable feet.
- Power supply: built-in 6 V rechargeable battery and 230Vac mains adapter (included).
- Operating temperature: from 0° C to 40° C.
- Packaging: dimensions: 310 x 130 x 370 mm - eight: 3,7 kg.
- Master Pack of 4 units: dimensions: 4 x (310 x 130 x 370) - weight 4 x (3,7 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: internal resolution of 300.000 points, entry of sampling items, entry of average piece weight, optimisation of the Average Piece Weight; item totalisation; automatic tare; zeroing; digital calibration; zero tracking.

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
NCS3K	218 x 267	3	0,1	0,01	199,00	CS4	60,00	NCS3KC 479,00
NCS6K	218 x 267	6	0,2	0,02	199,00	CS5	80,00	NCS6KC 479,00
NCS15K	218 x 267	15	0,5	0,05	199,00	CS5	80,00	NCS15KC 479,00
NCS30K	218 x 267	30	1	0,1	199,00	CS5	80,00	NCS30KC 479,00

## NCL SERIES COUNTING SCALES



**Compact and portable counting scale with large plate. High counting resolution and weighing accuracy. Ideal for rentals and inventories. 7 recallable A.P.W. memories.**

### MAIN FEATURES

- **3 green backlit LCD displays** for simultaneously viewing the weight, average piece weight and number of pieces.
- Mechanical membrane waterproof numerical and functional keypad with 24 keys.
- Stainless steel plate.
- Level and adjustable feet.
- Power supply: built-in rechargeable 6V battery and with fitted 230Vac mains adapter (included).
- Operating temperature: from 0° C to 40° C.
- Packaging: dimensions: 380 x 138 x 370 mm - weight: 4 kg.
- Master Pack of 4 units: dimensions: 4 x (380 x 138 x 370) mm - weight: 4 x (4 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: internal resolution of 300.000 points, entry of sampling items, entry of average piece weight, optimisation of the average piece weight, 7 recallable A.P.W. memories; totalisation; automatic tare; zeroing; digital calibration; zero tracking;

### Available versions

Code	Plate mm	Max Capacity	Division g	Resolution g	Price €	SIT Certificate	Price €	Masterpack Price € 4 pcs
NCL3K	235 x 335	3	0,1	0,01	249,00	CS4	60,00	NCL3KC 599,00
NCL6K	235 x 335	6	0,2	0,02	249,00	CS5	80,00	NCL6KC 599,00
NCL15K	235 x 335	15	0,5	0,05	249,00	CS5	80,00	NCL15KC 599,00
NCL30K	235 x 335	30	1	0,1	249,00	CS5	80,00	NCL30KC 599,00

## ASB SERIES PRICE COMPUTING SCALES



**Compact dual range price computing scales for commercial use. 10 PLU memories easily recallable with the keypad.**

### MAIN FEATURES

- 3 backlit LCD displays on operator side and 3 backlit LCD displays on customer side, with digits 20 mm high, for simultaneous indication of weight, price and amount.
- Membrane numeric and functional waterproof keypad with 20 keys.
- Stainless steel plate and protection cover.
- Power supply: built-in rechargeable battery (90-hour battery life) and 230 Vac mains power adapter.
- Packaging: dimensions: 410 x 375 x 180 mm - weight: 5,1 kg.
- Master Pack of 2 units: dimensions: 2 x (410 x 375 x 180) mm - weight 2 x (5,1 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- change of unit price: €/kg - €/100g; entry of unit price; amount totalisation; calculation of the change; 10 recallable PLU memories; automatic tare; zeroing; digital calibration; auto switch-off; backlight command; low battery warning.

**Available versions (for legal for trade use the CE-M approval is compulsory)**

Code	Plate mm	Max Capacity	CE-M2 Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
ASB6	230x300	3/6	1/2	240.00	CS5	80,00	ECEM2A	35,00	ASB6C 389,00
ASB15	230x300	6/15	2/5	240.00	CS5	80,00	ECEM2A	35,00	ASB15C 389,00
ASB30	230x300	15/30	5/10	240.00	CS5	80,00	ECEM2A	35,00	ASB30C 389,00

## ASBP SERIES PRICE COMPUTING SCALES



**Compact dual range price computing scales for commercial use. 10 PLU memories easily recallable with the keypad.**

### MAIN FEATURES

- 3 backlit LCD displays on operator side and 3 backlit LCD displays on customer side, with digits 20 mm high, for simultaneous indication of weight, price and amount.
- Membrane numeric and functional waterproof keypad with 20 keys.
- Stainless steel plate and protection cover.
- Power supply: built-in rechargeable battery (90-hour battery life) and 230 Vac mains power adapter.
- Overall height from ground with indicator and column: 530 mm.
- Packaging: dimensions: 550 x 380 x 235 mm - weight: 6 kg.
- Master Pack of 2 units: dimensions: 2 x (550 x 380 x 235) mm - weight: 2 x (6 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- change of unit price: €/kg - €/100g; entry of unit price; amount totalisation; calculation of the change; 10 recallable PLU memories; automatic tare; zeroing; digital calibration; auto switch-off; backlight command; low battery warning.

**Available versions (for legal for trade use the CE-M approval is compulsory)**

Code	Plate mm	Max Capacity	CE-M2 Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
ASBP6	230x300	6	1/2	269.00	CS5	80,00	ECEM2A	35,00	ASBP6C 429,00
ASBP15	230x300	15	2/5	269.00	CS5	80,00	ECEM2A	35,00	ASBP15C 429,00
ASBP30	230x300	30	5/10	269.00	CS5	80,00	ECEM2A	35,00	ASBP30C 429,00

## ASEP SERIES PRICE COMPUTING SCALES



Dual range price computing scales for commercial use. 99 PLU memories easily recallable from the keypad.

### MAIN FEATURES

- 3 backlit LCD displays with large easily visible digits, for simultaneously viewing weight, price and amount.
- Mechanical membrane waterproof keypad numeric and functional with 28 keys.
- Stainless steel plate and protection cover.
- Level and adjustable feet.
- Power supply: built-in rechargeable battery (120-hour battery life) and 230 Vac mains adapter (included).
- Packaging: dimensions: 420 x 450 x 280 mm - weight: 7 kg.
- Master Pack of 2 units: dimensions: 2 x (420 x 450 x 280) mm - weight: 2 x (7 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- unit price entry; 99 PLU memories with unit price (5 direct keys for the most frequent articles); automatic tare; zeroing; digital calibration; auto switch-off; backlight command; low battery warning.

Available versions (for legal for trade use the CE-M approval is compulsory)

Code	Plate mm	Max Capacity	CE-M2 Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
ASEP15	280x350	6/15	2/5	369,00	CS5	80,00	ECEM2A	35,00	ASEP15C 589,00
ASEP30	280x350	15/30	5/10	369,00	CS5	80,00	ECEM2A	35,00	ASEP30C 589,00

## ASEP-P SERIES PRICE COMPUTING SCALES



Dual range price computing scales with column for commercial use. 99 PLU memories easily recallable from the keypad.

### MAIN FEATURES

- 3 backlit LCD displays with large easily visible digits, for simultaneously viewing weight, price and amount.
- Mechanical membrane waterproof keypad numeric and functional with 28 keys.
- Stainless steel plate and protection cover.
- Level and adjustable feet.
- Power supply: built-in rechargeable battery (120-hour battery life) and 230 Vac mains adapter (included).
- Packaging: dimensions: 420 x 460 x 280 mm - weight: 9 kg.
- Master Pack of 2 units: dimensions: 2 x (420 x 460 x 280) mm - weight: 2 x (9 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- unit price entry; 99 PLU memories with unit price (5 direct keys for the most frequent articles); automatic tare; zeroing; digital calibration; auto switch-off; backlight command; low battery warning.

Available versions (for legal for trade use the CE-M approval is compulsory)

Code	Plate mm	Max Capacity	CE-M2 Division g	Price €	SIT Certificate	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
ASEP-P15	280x350	6/15	2/5	399,00	CS5	80,00	ECEM2A	35,00	ASEP-P15C 639,00
ASEP-P30	280x350	15/30	5/10	399,00	CS5	80,00	ECEM2A	35,00	ASEP-P30C 639,00

## "SPOT" series cash register



Spot cash register.



Rear customer view.

**Compact, small-sized, easy to use cash register with innovative design. Fitted with backlit large digit display, Multimedia Card for an electronic journal and programmable keyboard functions. Quick and silent integrated thermal printer; fitted with the Easyloading function for quick and easy substitution of the paper.**

### MAIN FEATURES

- Backlit alphanumeric operator side display with 2 lines 10 mm long for 16 characters each.
- Backlit alphanumeric customer side display with 1 line 15mm long for 16 characters.
- Standard keypad with 38 keys, easily and quickly configurable; resistant to pouring of liquids (waterproof system).
- Compact case in ABS, only 346 x 112 x 222mm.
- 8dot/mm integrated thermal printer, with an elevated graphics quality; 80mm/sec printing speed.
- Easyloading: quick paper change.
- Electronic cash journal saved on fitted Multimedia Card (one year duration).
- Sensors for paper end, printhead temperature and open printer cover.
- IN external power supplier: 110/240, OUT: 12Vdc, for direct connection to mains.

### MAIN FUNCTIONS:

- Operation cancellation; Article cancellation; Ticket cancellation; Goods return, Entries; Drawings; Drawer Opening; Percentages; Discounts and mark-ups; 3 closing Totals; Recall of previous total; VAT management; "Talking ticket" for entry of fiscal code or VAT code; Calculation of change; Easy Help on-line; Connection to PC or Scale through the serial line, for use as fiscal printer, with dedicated protocol.
- Departments and PLUs: 5 departments recallable directly from keyboard, expandable up to 10; programmable LALO- HALO; up to 1000 PLUs with numeric code (EAN/UPCA) and 12 description characters.
- Customisable printouts: Logo and Company name in printed heading; 24 print characters per line and 4 ticket end logos linkable to advertising messages;
- Reading of the data: reading of the fiscal memory through the printing; Reading of the cash journal on memory card through the printing or from PC.
- Operator management: up to 4, with log-in/log-out system

### Available Versions

Code	Description	Price (€)
SPOT	Compact cash register, with dual backlit display, integrated printer, and electronic cash journal on multimedia card.	540,00
SPOTC	Masterpack of 10 SPOT cash registers.	4300,00

### Options

Code	Description	Price (€)
SPCD	Painted metal cash drawer for coins and bills, size: 350x370x100mm, fitted with compartments for bills and 8 compartments for coins; electronically managed through the keyboard.	65,00
SPKITSV	Kit with attached battery pack, battery charger and rain protection cover for printer, for street vendor.	95,00
SPALC	12 Vdc power supplier with adapter for connection to car and truck lighters; fitted with 8m cable.	45,00
SPCABPC	Connection cable to ECR - PC, RS232 serial line.	45,00
SPMEM	Electronic cash journal (on Memory Card support), with annual duration.	45,00
SPMEMI	Electronic cash journal (on Memory Card support), with infinite duration.	110,00
SPRPF57	Fiscal paper roll, 30 m long, 57 mm width. 13 mm hole, external diameter of 50 mm.	1,20
SPRPF57C	50 Fiscal paper rolls, 30 m long, 57 mm width. 13 mm hole, external diameter of 50 mm.	55,00

## NJW SERIES LABORATORY SCALES



**Compact laboratory precision scale; 30.000 displayable divisions.**

### MAIN FEATURES

- Backlit LCD display having 6 digits 13 mm high.
- Mechanical membrane functional waterproof keypad, with 6 keys.
- Stainless steel plate.
- Power supply: 9 V battery (100-hour operating time) and fitted 230Vac/9Vdc mains power adapter.
- Operating temperature from 0° C to +40° C.
- Transparent plastic protection cover and windscreen (only with NJW300 model).
- Packaging:
  - NJW300 and 600: dimensions: 310 x 300 x 170 mm - weight: 1,6 kg;
  - other models: dimensions: 360 x 275 x 100 mm - weight: 1,5 kg.
- Master Pack of 2 units:
  - NJW300 & 600: dim. 2 x (310 x 300 x 170) mm - weight 2 x (1,6 kg);
  - other models: dim. 2 x (360 x 275 x 100) mm - weight 2 x (1,5 kg)

### FUNCTIONS

- counting: internal resolution of 150.000 points; weight percentage; unit of measure conversion: g, oz, lb, ozt, gn, dwt, ct, mm, TL.T, TL.t, TL.c, t, dr; zeroing; digital calibration; auto switch-off; low battery warning.

Upon request: SIT calibration with issuing of relative certificate.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
NJW300	Diam. 110	300	0,01	299.00	CS4	60,00	NJW300C 479,00
NJW600	Diam. 110	600	0,02	299.00	CS4	60,00	NJW600C 479,00
NJW1500	140x170	1500	0,05	299.00	CS4	60,00	NJW1500C 479,00
NJW3000	140x170	3000	0,1	299.00	CS4	60,00	NJW3000C 479,00

## NL SERIES LABORATORY SCALES



**Precision all-function portable compact scale for laboratories. 30.000 displayed divisions.**

### MAIN FEATURES

- LCD display with 5 digits 22 mm high.
- Mechanical membrane waterproof functional keypad with 8 keys.
- Stainless steel plate, windscreen.
- Level and adjustable feet.
- Power supply: rechargeable built-in battery (optional) and 230Vac mains power adapter (included).
- Serial port: RS232/C data output for connection to PC.
- Operating temperature from 5° C to +40° C.
- Packaging: dimensions: 320 x 240 x 145 mm - weight 2 kg.
- Master Pack of 3 units: dimensions 3 x (320 x 240 x 145) mm - weight 3 x (2 kg) approximately.

### FUNCTIONS

- counting; percentage weight; display update speed configuration; unit of measure conversion: g, ct, lb, oz, dr, gn, ozt, dwt, mm, TLJ, TL.T, TL.H, t; automatic tare; zeroing; digital calibration; zero tracking; low battery warning.

Upon request: SIT calibration with issuing of relative certificate.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 3 pcs
NL150A	diam. 117	150	0,005	199.00	CS4	60,00	NL150AC 419,00
NL300A	diam. 117	300	0,01	199.00	CS4	60,00	NL300AC 419,00
NL1500A	143 x 186	1500	0,05	199.00	CS4	60,00	NL1500AC 419,00
NL3000A	143 x 186	3000	0,1	199.00	CS4	60,00	NL3000AC 419,00
NL600H	diam. 117	600	0,01	239.00	CS4	60,00	NL600HC 499,00

**N.B. The NL3000A and NL1500A versions have a square plate and are supplied without windscreen**

## HGS SERIES TECHNICAL LABORATORY BALANCES

**INOX**



**All-function electronic balances entirely in stainless steel, for the food industries and laboratories. 30,000 displayed divisions.**

### MAIN FEATURES

- LCD display with 6 digits 19 mm high visible from all angles.
- Membrane functional waterproof keypad with 6 keys.
- Square stainless steel plate (HGS 1500/3000) or round with glass protection from currents of air (HGS300/600).
- Level and adjustable feet.
- Power supply: 9 V battery (100-hour operating time) and fitted 230Vac/9Vdc mains power adapter.
- Operating temperature from 0° C to +40° C.
- 60 mm scale height plus possible PLEXIGLAS cylindrical protection which brings total height to 185 mm.
- Packaging: dimensions: 345 x 390 x 175 mm - weight: 4 kg.
- Master Pack of 2 units: dimensions 2 x (345 x 390 x 175) mm - weight 2x (4 kg) approximately.

### FUNCTIONS

- percentage weight; counting; unit of measure conversion: g, oz, lb, ozt, gn, dwt, ct, mm, TL.T, TL.t, TL.c, t, dr; tare; zeroing; digital calibration; zero tracking; auto switch-off; low battery warning.

Upon request: SIT calibration with issuing of relative certificate.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
HGS300	Diam. 150	300	0,01	359.00	CS4	60,00	HGS300C 579,00
HGS600	Diam. 150	600	0,02	359.00	CS4	60,00	HGS600C 579,00
HGS1500	210x210	1500	0,05	359.00	CS4	60,00	HGS1500C 579,00
HGS3000	210x210	3000	0,1	359.00	CS4	60,00	HGS3000C 579,00

## JW SERIES LABORATORY SCALES



**Electronic scales for industry and laboratory. 50.000 displayed divisions.**

### MAIN FEATURES

- LCD backlit display with 6 digits 19 mm high visible from all angles.
- Membrane waterproof functional keypad with 6 keys.
- Stainless steel square feet (JW2500) or spherical with protection from air currents (JW250/500/1000).
- Level and adjustable feet.
- Power supply: rechargeable built-in battery (100-hour operating time) and fitted 230Vac mains adapter.
- Serial port: RS232/C data output for PC connection.
- Operating temperature from 10° C to +35° C.
- 60 mm scale height plus possible cylindrical protection which brings total height at 280 mm.
- Packaging: dimensions 310 x 310 x 230 mm - weight 2,5 kg.
- Master Pack of 2 units: dimensions 2 x (310 x 310 x 230) mm - weight 2 x (2,5 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- counting: 500.000 internal resolutions; percentage weight; unit of measure conversion: g, oz, lb, ozt, gn, dwt, ct, mm, TL.T, TL.t, TL.c, t, dr; automatic tare; zeroing; digital calibration; zero tracking; auto-switch off; low battery warning.

### Available versions

Code	Plate mm	Capacity g	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
JW250	Diam. 110	250	0,005	399.00	CS4	60,00	JW250C 639,00
JW500	Diam. 110	500	0,01	399.00	CS4	60,00	JW500C 639,00
JW1000	Diam. 110	1000	0,02	399.00	CS4	60,00	JW1000C 639,00
JW2500	140 x 170	2500	0,05	399.00	CS4	60,00	JW2500C 639,00

## ALD SERIES LABORATORY SCALES



Quick, sturdy, multifunctional high precision scales, suitable for laboratory and industrial use or for legal for trade use. Elegant design, compact and easy to clean. Weight detection through electromagnetic monobloc compensation load cell; the scale is available either with internal calibration (CM versions) or with external calibration. RS232 serial port for connection to printer or PC. Usable as remote scale in counting, statistical check systems, etc.

### MAIN FEATURES

- Backlit Lcd Display with line of 7 numeric 15mm digits, line with up to 10 alphanumeric 7mm characters, and icons showing active functions
- Waterproof 4-key functional keypad.
- Main functions: on/zero, print, Select funct., automatic tare
- Secondary functions: off, unit of measure change, Application funct., menu / cal
- Selectable application functions: weighing, counting, percentage weighing.
- Additional features: Internal calibration (CM versions)
- RS232 interface for connection to printer or pc
- Construction: bearing structure in die cast aluminium with 4 adjustable feet, ABS involucre
- Fitted with: stainless steel plate, weigh-below hook, bracket for safety hook, draftshield with sliding doors.
- Operating temperature: from +10° to + 30°.
- Power supply: 230 Vac 50Hz – 12 Vdc with external mains adapter
- Dimensions : 220 x 310 x 85
- Carton packing: 390 x 500 x 340 – weight: 7 kg
- Upon request: SIT calibration with issuing of relative certificate

### Available Versions

Code	Plate mm	Capacity g	Division g	CE-M Division g	Linearity g +/-	Price €	SIT Certificate	Price €	CE-M Approval	Price €
ALD114	Ø 90	110	0,0001		0,0002	1049.00	CS1	120,00		
ALD114CM <b>Cal</b>	Ø 90	110	0,0001	0,001	0,0002	1199.00	CS1	120,00	ECEM1L	60,00
ALD214	Ø 90	210	0,0001		0,0002	1179.00	CS1	120,00		
ALD214CM <b>Cal</b>	Ø 90	210	0,0001	0,001	0,0002	1339.00	CS1	120,00	ECEM1L	60,00

### Options

Code	Description	Price (€)
OBTPRSH	Thermal printer ABS option box having >50mm/sec. speed, 203 dpi resolution, 24/40 columns, 58 mm paper width; 50 mm Roll diameter; includes the 110-240 Vac power adapter. For Scale House products	310,00
ALDCAB3S	Cable for connecting ALD scales to 3590M3 indicators (possible only with IFKBRD serial port option)	70,00
RSCBAL	1,5m cable for connecting ALD scale to OBTPRSH printer	40,00
RSCBPCAL	Serial cable 1,5m long for connecting ALD scale to the PC	60,00
ALDDK	Density determination kit of solids for ALD series' scales with division of 1mg and 0,1mg	390,00

## ALD SERIES LABORATORY SCALES



Upon request: SIT calibration with issuing of relative certificate

**Quick, sturdy, multifunctional high precision scales, suitable for laboratory and industrial use or for legal for trade use. Elegant design, compact and easy to clean. Weight detection through electromagnetic monobloc compensation load cell; the scale is available either with internal calibration (CM versions) or with external calibration. RS232 serial port for connection to printer or PC. Usable as remote scale in counting, statistical check systems, etc.**

### MAIN FEATURES

- Backlit Lcd Display with line of 7 numeric 15mm digits, line with up to 10 alphanumeric 7mm characters, and icons showing active functions
- Waterproof 4-key functional keypad.
- Main functions: on/zero, print, Select funct., automatic tare
- Secondary functions: off, unit of measure change, Application funct., menu / cal
- Selectable application functions: weighing, counting, percentage weighing.
- Additional features: Internal calibration (CM versions)
- RS232 interface for connection to printer or pc
- Construction: bearing structure in die cast aluminium with 4 adjustable feet, ABS involucre
- Fitted with: stainless steel plate, weigh-below hook, bracket for safety hook, draftshield with sliding doors.
- Operating temperature: from +10° to + 30°.
- Power supply: 230 Vac 50Hz – 12 Vdc with external mains adapter
- Dimensions : 220 x 310 x 85
- Carton packing: 390 x 500 x 340 – weight: 7 kg

### Available Versions

Code	Plate mm	Capacity g	Division g	CE-M Division g	Linearity g +/-	Price €	SIT Certificate	Price €	CE-M Approval	Price €
ALD213	Ø 120	210	0,001		0,0002	729.00	CS1	120,00		
ALD213CM <b>Cal</b>	Ø 120	210	0,001	0,01	0,0002	859.00	CS1	120,00	ECEM1L	60,00
ALD413	Ø 120	410	0,001		0,0002	749.00	CS1	120,00		
ALD513CM <b>Cal</b>	Ø 120	510	0,001	0,01	0,002	889.00	CS1	120,00	ECEM1L	60,00

## ALD SERIES LABORATORY SCALES



### FUNCTIONS

- Main functions: on/zero, print, Select funct., automatic tare
- Secondary functions: off, unit of measure change, Application funct., menu / cal
- Selectable application functions: weighing, counting, percentage weighing.

**Quick, sturdy, multifunctional high precision scales, suitable for laboratory and industrial use or for legal for trade use. Elegant design, compact and easy to clean. Weight detection through electromagnetic monobloc compensation load cell; the scale is available either with internal calibration (CM versions) or with external calibration. RS232 serial port for connection to printer or PC. Usable as remote scale in counting, statistical check systems, etc.**

### MAIN FEATURES

- Backlit Lcd Display with line of 7 numeric 15mm digits, line with up to 10 alphanumeric 7mm characters, and icons showing active functions
- Waterproof 4-key functional keypad.
- Additional features: Internal calibration (CM versions)
- RS232 interface for connection to printer or pc
- Bearing structure in die cast aluminium with 4 adjustable feet, ABS involucre
- Fitted with: stainless steel plate, weigh-below hook, bracket for safety hook, draftshield with sliding doors.
- Operating temperature: from +10° to + 30°.
- Power supply: 230 Vac 50Hz – 12 Vdc with external mains adapter
- Dimensions : 220 x 310 x 85
- Carton packing: 390 x 500 x 340 – weight: 7 kg
- Upon request: SIT calibration with issuing of relative certificate

### Available Versions

Code	Plate mm	Capacity g	Division g	CE-M Division g	Linearity g +/-	Price €	SIT Certificate	Price €	CE-M Approval	Price €
ALD2102	195x200	2100	0,01		0,002	719.00	CS1	120,00		
ALD2102CM <b>Cal</b>	168x180	2100	0,01	0,1	0,002	849.00	CS1	120,00	ECEM1L	60,00
ALD4102	195x200	4100	0,01		0,002	739.00	CS1	120,00		
ALD4102CM <b>Cal</b>	168x180	4100	0,01	0,1	0,002	879.00	CS1	120,00	ECEM1L	60,00

## PHS SERIES PORTABLE CRANE SCALES



**Portable and accurate crane scale for weighing anywhere. Has a continuous 250-hour operating time (auto-switch off function in case it's not used for a long time).**

### MAIN FEATURES

- Backlit LCD display with 5 digits 24 mm high.
- Mechanical membrane functional waterproof keypad with 4 keys: off, hold, on/zero, mode.
- Nominal overload: 200% f.s.
- Maximum overload: 300% f.s. (but with a 60 kg maximum limit for PHS30K model).
- Power supply: 4 built-in 1.5 V UM2 type size C batteries (not included).
- Operating temperature from +0° C to +40° C.
- Packaging: dimensions: 200 x 260 x 100 mm - weight: 1 kg.
- Master Pack of 2 units: dimensions: 2 x (200 x 260 x 100) mm - weight: 2 x (1 kg) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- Hold function; unit of measure conversion: kg, lb, oz; zeroing; digital calibration; auto switch-off; backlight command; low battery warning.

### Available versions

Code	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
PHS3000	3	2	159,00	CS4	60,00	PHS3000C 259,00
PHS7500	7,5	5	159,00	CS5	80,00	PHS7500C 259,00
PHS15K	15	10	159,00	CS5	80,00	PHS15KC 259,00
PHS30K	30	20	159,00	CS5	80,00	PHS30KC 259,00

## CHS SERIES PORTABLE CRANE SCALES



**Portable, practical crane scale for weighing anywhere. Sturdy and reliable.**

### MAIN FEATURES

- LCD display with 5 digits.
- Mechanical membrane functional waterproof keypad with 3 keys: on / off, hold / unit, zero / tare.
- Power supply: 3 AA internal 1.5 V batteries (included).
- Operating temperature from +0° C to +40° C.
- Packaging: dimensions: 240 x 130 x 80 mm - weight: 625 g.
- Master Pack of 2 units: dimensions: 2 x (240 x 130 x 80) mm - weight: 2 x (625 g) approximately.
- Upon request: SIT calibration with issuing of relative certificate.

### FUNCTIONS

- Hold function;
- unit of measure conversion: kg, lb;
- automatic tare;
- zeroing;
- digital calibration;
- auto-switch off

### Available versions

Code	Max Capacity	Division g	Price €	SIT Certificate	Price €	Masterpack Price € 2 pcs
CHS20	20	10	120,00	CS4	60,00	CHS20C 199,00
CHS40	40	20	120,00	CS4	60,00	CHS40C 199,00
CHS100	100	50	120,00	CS4	60,00	CHS100C 199,00
CHS200	200	100	120,00	CS4	60,00	CHS200C 199,00

## OCSF SERIES DIGITAL CRANE SCALES

**Compact, precise, sturdy and versatile crane scale. 70-hour operating time with continuous use; fitted with an upper shackle and a swivelling lower hook.**

### MAIN FEATURES

- Very bright backlit 30mm LCD display with 5-key multifunction keypad.
- Precision: +/- 0.05% F.S.
- ABS case.
- Safe overload: 125% f.s. Ultimate overload: 200% f.s.
- Operating temperature: from -10°C to +40°C.
- Fitted with: Upper shackle and lower hook.
- 70-hour operating time; autoswitch-off function when not used for a long time.
- Power supply: 3 AAA batteries

### FUNCTIONS:

- Zero, HOLD (lock of displayed weight), Net/Gross, Accumulation of up to 10 weighs, kg/lb conversion.



### Available Versions

Code	Max Capacity	Division kg	Price €	Masterpack Price € 2 pcs
OCSF50	50	0,01/0,02	139,00	OCSF50C 219,00
OCSF150	150	0,02/0,05	139,00	OCSF150C 219,00
OCSF300	300	0,05/0,1	139,00	OCSF300C 219,00

## OCS SERIES DIGITAL CRANE SCALES

**Compact, precise, sturdy and versatile crane scale. 70-hour operating time with continuous use; fitted with an upper shackle and a lower hook. Remote control for managing the crane scale from a distance.**

### MAIN FEATURES

- Very bright 30mm LED display.
- Precision: +/- 0.05% F.S.
- 4-key multifunction keypad.
- Painted steel case.
- Safe Overload: 125% f.s.
- Ultimate overload: 400% f.s.
- Operating temperature: from -10°C to +40°C.
- Fitted with: Upper shackle and lower hook; remote control.
- 70-hour operating time; autoswitch-off function in case it's not used for a long time.
- Power supply: Built-in rechargeable battery; 230 Vac power supplier (included)
- Weight: OCS3T: 14kg; OCS5T: 24kg; OCS10T: 44kg.

### FUNCTIONS

- Zero, HOLD (lock of displayed weight), Net/Gross, weighs storage, Totalisation, lb/kg conversion.



### Available versions

Code	Max Capacity	Division kg	Price €	Masterpack Price € 2 pcs
OCS3T	3000	1	590,00	OCS3TC 890,00
OCS5T	5000	2	690,00	OCS5TC 990,00
OCS10T	10000	5	790,00	OCS10TC 1290,00

## FR SERIES SINGLE CELL PLATFORMS



Small and medium sized electronic platforms with off-center approved load cell. Stainless steel plate connectable to any weight indicator for load cells.

### MAIN FEATURES

- Functions with an aluminium "single point" OIML R60 approved load cell, with protection against dust and moisture according to IP65 standards (350 Ohm input resistance).
- Structure with oven-fire painted steel tubulars, adjustable resting feet, and level.
- Fitted with satined AISI304 stainless steel load surface.
- Up to 15 Vdc power supply.
- Screened 3m connection cable with connectors for connection to the indicator.


### Available versions

Code	Plate mm	Height mm	Max Capacity	Division g	CE-M Division g	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
FRQ60	400x400	125	60	20	20	199.00	ECEM1B	70,00	FRQ60C 319,00
FRQ150	400x400	130	150	50	50	199.00	ECEM1B	70,00	FRQ150C 319,00
FRX60	600x600	150	60	20	20	349.00	ECEM1B	70,00	FRX60C 559,00
FRX150	600x600	150	150	50	50	349.00	ECEM1B	70,00	FRX150C 559,00
FRX300	600x600	150	300	100	100	349.00	ECEM1B	70,00	FRX300C 559,00
FRE300	800x800	170	300	100	100	649.00	ECEM1B	70,00	FRE300C 1039,00
FRE600	800x800	170	600	200	200	649.00	ECEM1B	70,00	FRE600C 1039,00

### Options

Code	Description	Price (€)
FRCL	Indicator holding column 700mm high for FR single-cell platforms (suitable only for ILW & IRW indicators)	60,00
SHCAL1	Indicator connection/configuration/calibration at our premises of scale with capacity up to 30kg - NET PRICE	30,00
SHCAL2	Indicator connection/configuration/calibration at our premises of scale with capacity up to 1500kg - NET PRICE	60,00
SHCAL3	Indicator connection/configuration/calibration at our premises of scale with capacity up to 6000kg - NET PRICE	120,00

## FL SERIES 4-CELL PLATFORMS

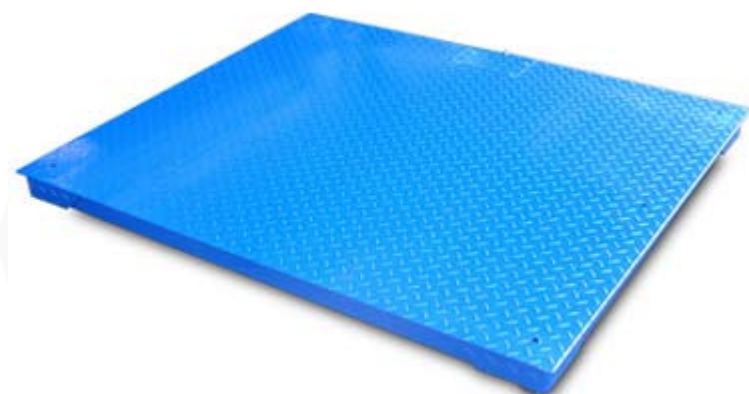

Monobloc electronic platforms suitable for weighing above ground in all types of industrial and commercial applications. Connectable to any weight indicator for load cells.

### TECHNICAL FEATURES

- Functions with 4 OIML R60 approved load cells, with protection against dust and moisture according to IP65 standards (350 Ohm input resistance).
- Monobloc structure with oven-fire painted steel tubulars, adjustable resting feet, and level. Fixed striated sheet steel load surface.
- 15 Vdc power supply.
- Screened 3m connection cable with connectors for connection to the indicator.
- **Model Dimensions**

### Available versions

Code	Dimensions (LxPxH) mm	Max Capacity	Division g	CE-M Division g	Price €	CE-M Approval	Price €	Masterpack Price € 2 pcs
FLA600	1000x1000x100	600	200	200	849.00	ECEM1B	70,00	FLA600C 1359,00
FLA1500	1000x1000x100	1500	500	500	849.00	ECEM1B	70,00	FLA1500C 1359,00
FLB600	1250x1250x100	600	200	200	899.00	ECEM1B	70,00	FLB600C 1459,00
FLB1500	1250x1250x100	1500	500	500	899.00	ECEM1B	70,00	FLB1500C 1459,00
FLD1500	1250x1500x100	1500	500	500	949.00	ECEM1B	70,00	FLD1500C 1499,00
FLD3000	1250x1500x100	3000	1000	1000	949.00	ECEM1C	140,00	FLD3000C 1499,00
FLE1500	1500x1500x100	1500	500	500	999.00	ECEM1B	70,00	FLE1500C 1599,00
FLE3000	1500x1500x100	3000	1000	1000	999.00	ECEM1C	140,00	FLE3000C 1599,00

## IRW SERIES WEIGHT INDICATOR



**Multifunction weight indicator connectable to load cell platforms. Manual or automatic totalisation.**

### MAIN FEATURES

- Red LED display with 6 digits 24mm high.
- Mechanical membrane waterproof keypad with 5 keys: on / off, zero, tare, M+, unit.
- Connection with up to 4 load cells with input resistance of 350 Ohm.
- Up to 15.000 displayable divisions for internal factory use.
- Available configurable capacities: 30, 60, 120, 150, 300, 600, 1500, 3000, 6000.
- Configurable Divisions: 3000, 6000, 15000.
- Calibration and Set-Up parameters from keypad.
- Power supply: fitted rechargeable battery (90 hours of continuous use) and 230 Vac mains power adapter (included).
- ABS case.
- Protection cover.
- Packaging: dimensions: 340 x 260 x 230 mm - weight: 2,5 kg.
- Master Pack of 2 units: dimensions 2 x (340 x 260 x 230) mm - weight 2 x (2,5 kg) approximately.

### FUNCTIONS

- manual or automatic weight totalisation; unit of measure conversion: kg, lb; automatic tare; zeroing; digital calibration; autoswitch-off; automatic stand-by; low battery warning.

### Available versions

Code	Description	Price (€)
IRW	24mm Led display, battery powered	129,00
IRWC	Master Pack of 2 IRW indicators with 24mm Led display, battery powered	209,00

## ILW SERIES WEIGHT INDICATOR



**Multifunction weight indicator, easily visible in any condition of use, connectable to load cell platforms, and usable in various weighing applications: weight checking with 2 thresholds, counting, and totalisation.**

### MAIN FEATURES

- Large LCD backlit display with 6 digits 52mm high.
- Mechanical membrane 7-key alphanumeric keypad with acoustic feed.
- Connection with up to 4 load cells with input resistance of 350 Ohm.
- Up to 15.000 displayable divisions for internal factory use.
- Calibration and Set-Up parameters from the keypad.
- Power supply: fitted rechargeable battery (90 hours of continuous use) and 230 Vac mains power adapter (included).
- ABS case.
- Transparent protection cover for mounting on column.
- Packaging: dimensions: 325 x 200 x 240 mm - weight: 2,2 kg.
- Master Pack of 2 units: dimensions 2 x (325 x 200 x 204) mm - weight 2 x (2,2 kg) approximately.

### FUNCTIONS

- manual or automatic weight accumulation; counting; quantity check with 2 weight thresholds accompanied by an acoustic alarm; unit of measure conversion: kg, lb, OZ; automatic tare; zeroing; digital calibration; zero tracking; auto switch-off; weighing filter enabling; backlight command; low battery warning.

### Available versions

Code	Description	Price (€)
ILW	Indicator with LCD display with 6 digits 52 mm high, battery powered	189,00
ILWC	Master Pack of 2 ILW indicators	309,00

## ILWI SERIES WEIGHT INDICATOR



**Multifunction weight indicator with stainless steel case and easily readable digits, connectable to load cell platforms. Usable in various weighing applications: weight checking with 2 thresholds, counting, and totalisation.**

### MAIN FEATURES

- Large LCD backlit display with 6 digits 52mm high.
- Mechanical membrane 7-key alphanumeric keypad with acoustic feed.
- Connection with up to 4 load cells with input resistance of 350 Ohm.
- Up to 15.000 displayable divisions for internal factory use.
- Calibration and Set-Up parameters from the keypad.
- Power supply: fitted rechargeable battery (90 hours of continuous use) and 230 Vac mains power adapter (included).
- IP65 stainless steel case.
- Transparent protection cover for mounting on column.
- Packaging: dimensions: 325 x 195 x 230 mm - weight: 2,6 kg.
- Master Pack of 2 units: dimensions 2 x (325 x 195 x 230) mm - weight 2 x (2,6 kg) approximately.

### FUNCTIONS

- manual or automatic weight accumulation; counting; quantity check with 2 weight thresholds accompanied by an acoustic alarm; unit of measure conversion: kg, lb, OZ; automatic tare; zeroing; digital calibration; zero tracking; auto switch-off; weighing filter enabling; backlight command; low battery warning.

### Available versions

Code	Description	Price (€)
ILWI	Stainless steel indicator with 6 digits 52mm high, battery-powered	289,00
ILWIC	Master pack of 2 ILWI indicators	459,00

## SCALE HOUSE ACCESSORIES AND SERVICES

### CALIBRATION SERVICE RATES INCLUDING SIT CERTIFICATE \*

- Scale calibration certification service at our premises, with release of the "TEST CERTIFICATE" in relation to the EN 45501 norm and copy of the SIT calibration certificate of the reference sample masses.
- **CLASS I INSTRUMENT CALIBRATION WITH SIT TEST CERTIFICATE**
  - Up to 5 kg - CS1 - 120.00 Euro
  - Up to 150 kg - CS3 - 150.00 Euro
- **CLASS II AND III INSTRUMENT CALIBRATION WITH SIT TEST CERTIFICATE**
  - Up to 5 kg - CS4 - 60.00 Euro
  - Up to 30 kg - CS5 - 80.00 Euro
  - Up to 150 kg - CS6 - 90.00 Euro
- **CLASS II AND III INSTRUMENT CALIBRATION WITH DINI ARGEO TEST CERTIFICATE AND SIT REFERENCE WEIGHTS**
  - Up to 1500 kg - CS7 - 100.00 Euro
  - Up to 6000 kg - CS8 - 150.00 Euro
  - Up to 15000 kg - CS9 - 200.00 Euro (crane scales - Max. 10000 kg)
- \* Only up to 150 kg
- N.B: Prices valid only for new instruments ex works.

### Accessories and Services

Code	Description	Price (€)
TP25	Stainless steel plate with discharge outlet gr. 250, ø 250mm h=48mm.	30,00
TP32	Stainless steel plate with discharge outlet gr. 550, ø 320mm h=55mm.	36,00
SBL1	Stainless steel plate with discharge outlet gr. 1150, ø360mm h=120mm	72,00
S2	Stainless steel fruit plate 800g dimensions 310 x 410 mm, h 50 mm	34,00
PMCL	COLUMN FOR PM/APM SCALE: it brings the indicator base height to 445 mm above the scale surface. The overall height of the scale therefore becomes 630mm (including the indicator)	30,00
FRCL	Indicator holding column 700mm high for FR single-cell platforms (suitable only for ILW & IRW indicators)	60,00
SHCAL1	Indicator connection/configuration/calibration at our premises of scale with capacity up to 30kg - NET PRICE	30,00
SHCAL2	Indicator connection/configuration/calibration at our premises of scale with capacity up to 1500kg - NET PRICE	60,00
SHCAL3	Indicator connection/configuration/calibration at our premises of scale with capacity up to 6000kg - NET PRICE	120,00
UMAN	Printed user manual (downloadable from the web, free) NET PRICE	5,00

## GENERAL SALES AND WARRANTY CONDITIONS

### WARRANTY/ TECHN. ASSISTANCE/INSTALLATION/RETURNS/TRANSPORT/PAYMENTS

- The warranty is TWO YEARS from delivery, excluding the parts classified as expendable materials such as: mechanical printing heads, batteries, and electric motors and wheels. The warranty for these expendable materials is 6 months.
- The warranty covers free labour and spare parts for INSTRUMENTS RETURNED PREPAID TO DINI ARGEO, for breakdowns not attributable to the Customer
- If work is required at the place of use, the Customer will bear the technician's transfer expenses.
- THE WARRANTY IS VOIDED if breakdowns occur due to improper use or if the instrument is tampered with by personnel not authorised by Dini Argeo or due to connections to other devices. This warranty DOES NOT provide for any compensation for losses or damages, direct or indirect, incurred by the Customer due to complete or partial failure of instruments or systems sold, even during the warranty period. Specifically, the warranty for the load cells excludes the damages caused by knocks and overloads (the overload is evident if the cell output signal measured, supplied and without load, is an output voltage over 2 mV).
- Repairs at Dini Argeo's premises are made with the hourly charge in force and on the basis of the prices shown in the spare parts price list. If the repair price estimate is necessary before proceeding, the Customer must explicitly request it when ordering the repair of the goods. In this case the repair will be made after the acceptance of the price estimate filled in by the Dini Argeo technical assistance dept. The technical assistance and/or installation at the customer's premises is carried out after agreement with Dini Argeo technical and/or sales personnel and with written confirmation for acceptance of the conditions in force at the time.
- The repair of DINI ARGEO products must be requested filling in the proper RMA (Return Material Authorisation) form.. Once the form has been received the Technical Assistance Dept. (DINI SERVICE) will communicate the RMA number to the applicant who will indicate it on the documents accompanying the product. **The RMA request form can be downloaded from the [www.diniargeo.com](http://www.diniargeo.com) web site**
- Returned products will only be accepted, if previously agreed upon and authorised by Dini Argeo's sales office. The credit note will be made with a reduction of 10% off the purchase price with standard products in perfect condition, and will be agreed upon with custom-made products or those not in perfect conditions.
- Delivery is Ex Works. The transport risks, loss and/or damage of goods, are to be borne by the buyer even if the goods are delivered carriage free.
- The prices shown include also packing when the goods fit in a carton with dimensions up to 680 x 520 x 320 mm. When the goods take up more space pallets are used
- For orders with total amounts less than 50 Euro, the prices will be considered as net (without discount).
- Payment delays, collection fees, and interest arrears, will be charged at the "prime rate" increased by 5%.
- Any claims or objections do not authorise the buyer to delay or suspend payments.
- The selling prices are considered accepted by Dini Argeo only after written confirmation of the purchase order by Dini Argeo. Dini Argeo reserves the ownership rights on the delivered material until the payment of the goods has been made by the customer. The purchase of Dini Argeo products shall be subject to Italian Law. Any disputes arising under or in connection with supply of Dini Argeo products shall be finally settled by The Chamber of Commerce of Modena.